
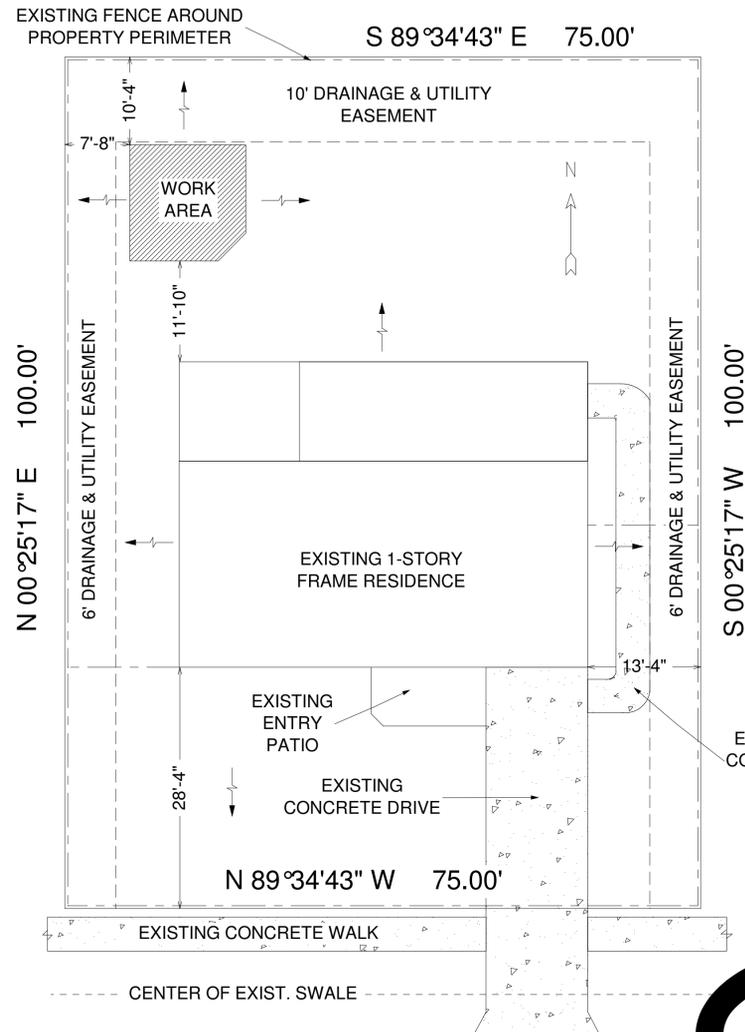



THIS DESIGN IS THE INTELLECTUAL PROPERTY OF DREAMCATCHER BUILDING DESIGNS. IT IS NOT TO BE REPRODUCED OR REUSED WITHOUT THE EXPRESS CONSENT OF DREAMCATCHER BUILDING DESIGNS.

SAMPLE GARDENING SHED


Dreamcatcher Building Designs (941) 462-0110 www.dreamcatcherbuildingdesigns.com




PLOT PLAN SCALE: 1" = 10'-0"

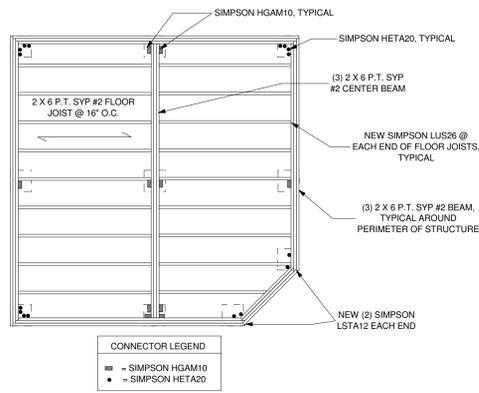


FLOOR FRAMING PLAN SCALE: 1/4" = 1'-0"

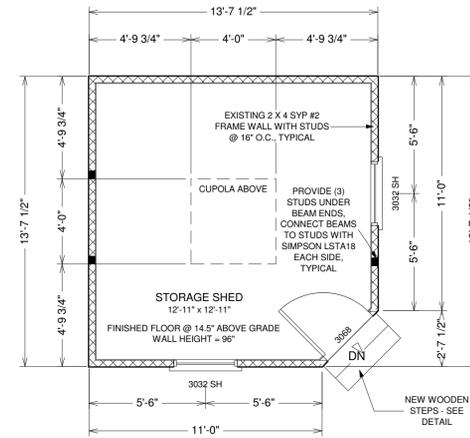

FLOOR PLAN SCALE: 1/4" = 1'-0"

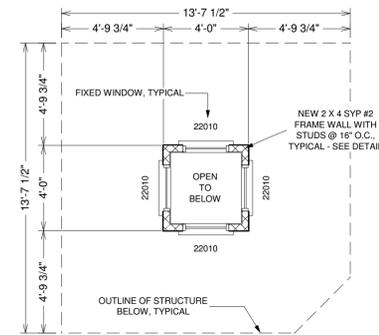


CUPOLA PLAN SCALE: 1/4" = 1'-0"

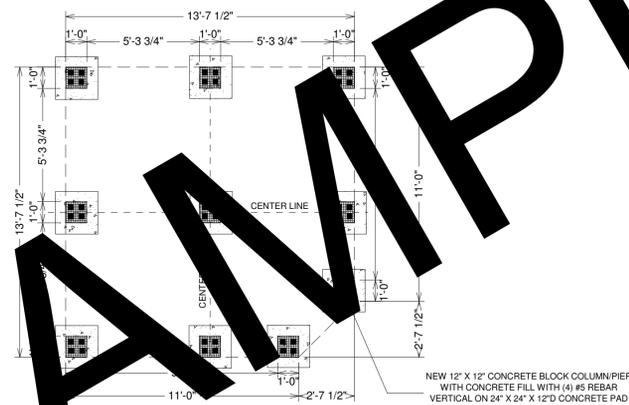


FOUNDATION PLAN SCALE: 1/4" = 1'-0"

NOTE: THE DESIGN REQUIRE FOR ALL WINDOWS AND DOOR IS +5/8" GLASS. ALL GLASS IS TO BE IMPACT RESISTANT OR HAVE SHUTTERS. SEE ATTACHED DETAIL SHEET FOR SHUTTER DETAIL.

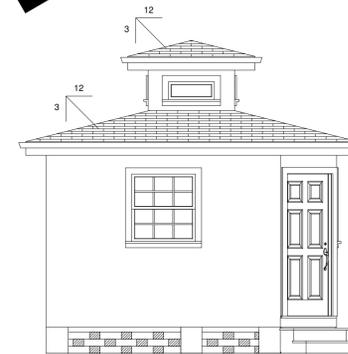


FRONT ELEVATION SCALE: 1/4" = 1'-0"

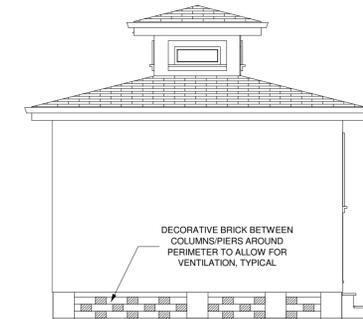

LEFT ELEVATION SCALE: 1/4" = 1'-0"




RIGHT ELEVATION SCALE: 1/4" = 1'-0"

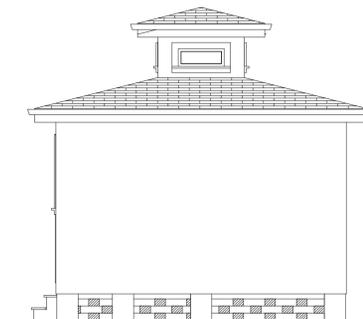

REAR ELEVATION SCALE: 1/4" = 1'-0"

NOTE: DECORATIVE BRICK SHOWN FOR INFORMATIVE PURPOSES, IT IS NOT INTENDED TO SHOWN EXACT LOCATIONS/INSTALLATION OF BRICKS.

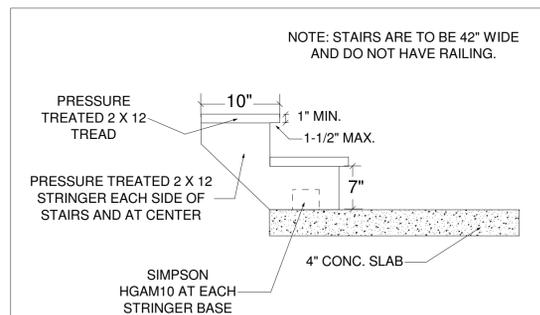

WOOD STAIR DETAIL NOT TO SCALE


THIS STRUCTURE IS DESIGNED IN ACCORDANCE WITH THE 2014 FLORIDA BUILDING CODE, 5TH EDITION.

SAMPLE


THIS DESIGN IS THE INTELLECTUAL PROPERTY OF DREAMCATCHER BUILDING DESIGNS. IT IS NOT TO BE REPRODUCED OR REUSED WITHOUT THE EXPRESS CONSENT OF DREAMCATCHER BUILDING DESIGNS.

SAMPLE GARDENING SHED


Dreamcatcher Building Designs
 (941) 462-0110
 www.dreamcatcherbuildingdesigns.com




NOTE: 2" MAXIMUM (FOR 2 X 6 OR 2 X 8 RAFTER) BIRDSMOUTH ALLOWABLE AT WALL INTERSECTIONS.

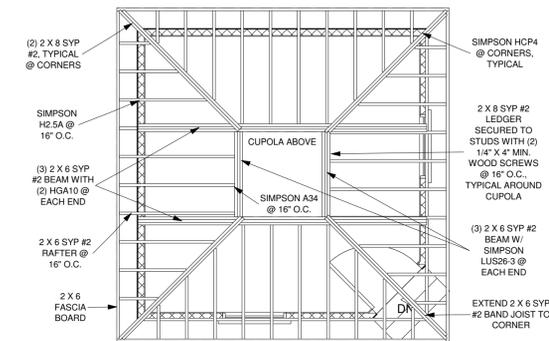

ROOF FRAMING PLAN
 SCALE: 1/4" = 1'-0"



CUPOLA ROOF FRAMING PLAN
 SCALE: 1/4" = 1'-0"

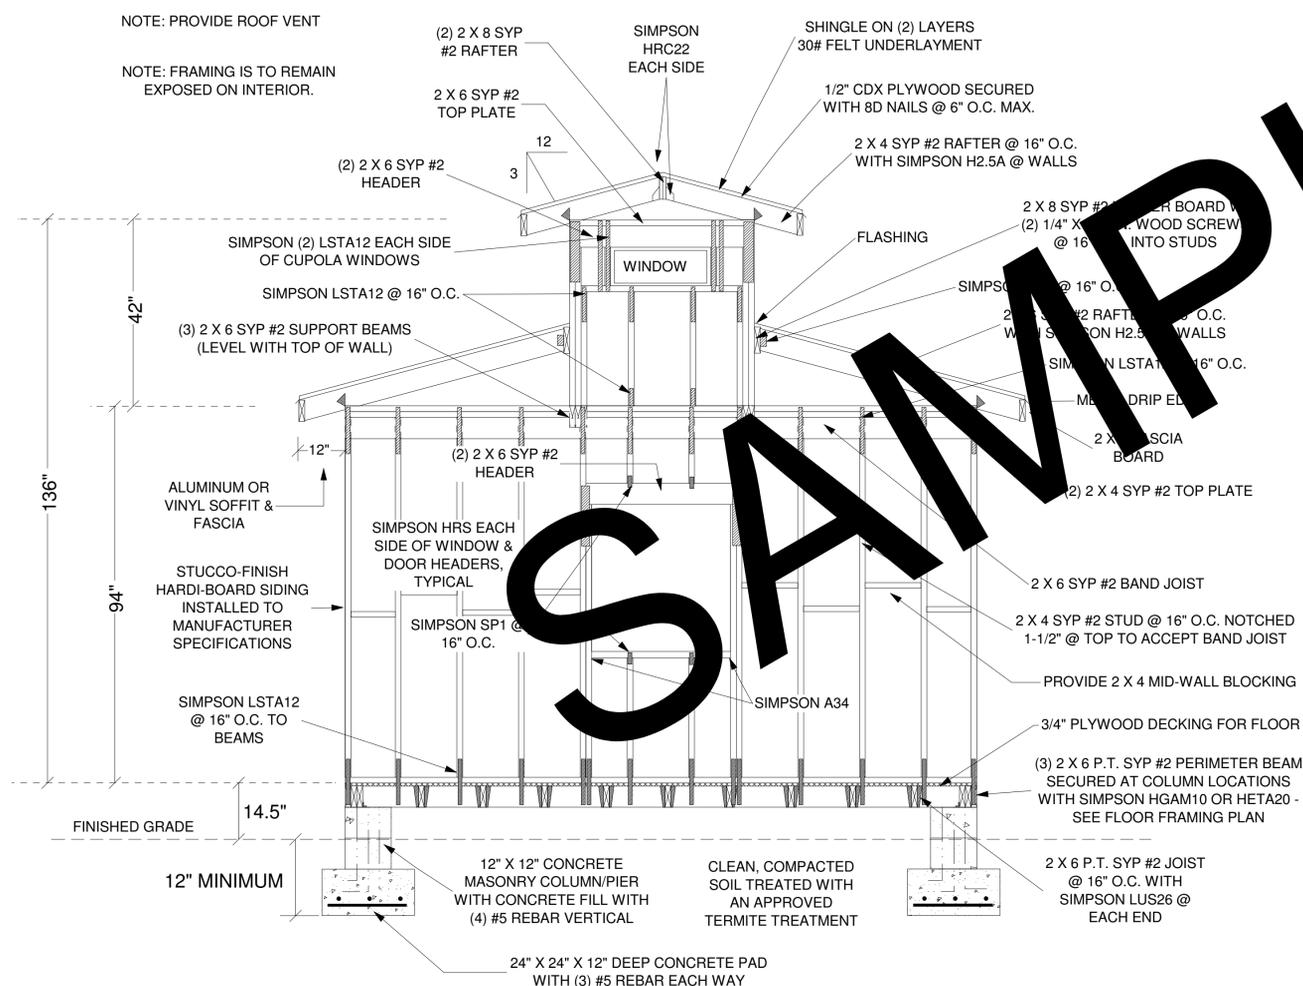

TYPICAL CROSS SECTION
 NOT TO SCALE

ROOF NOTES:

- 2 X 6 SYP #2 RAFTER @ 16" O.C. FOR LOWER ROOF, 2 X 4 SYP #2 RAFTER @ 16" O.C. FOR UPPER ROOF
- ALL RAFTERS TO BE CONNECTED AT WALL WITH SIMPSON H2.5A UNLESS OTHERWISE NOTED
- ROOF PITCH: 3/12
- OVERHANGS: 12" MIN.
- COVERING: SHINGLE, PROVIDE (2) LAYERS 30# FELT UNDERLAYMENT

ALL ROOFING PLYWOOD IS TO BE 15/32" (1/2" NOMINAL) MINIMUM AND SECURED WITH 8D NAILS @ 6" O.C. MAXIMUM